

LIFTING TROLLEY REFLEX 75 RFR IP54

M4300050



Lifting Trolley Reflex 75 rfr IP 54

The stainless steel option for more demanding environments! IP 54 classified. Lifts up to 75 kg. Removable control unit. On/Off switch and battery indicator.



TnT Handling USA, Inc.

Ph: 610-701-6350

Fx: 610-701-6354



E-mail info@tnthandling.com , Web www.tnthandling.com

HALLINS

Lifting Trolley Reflex 75 rfr IP 54

The stainless steel option for more demanding environments! IP 54 classified. Lifts up to 75 kg. Removable control unit. On/Off switch and battery indicator.


Article	M4300060
Consists of	M4210014-02 + M4250005-01
Lifting capacity	75 kg
Max lifting height	1735 mm
Min lifting height	140 mm
Dimensions LxBxH	880x500x2056 mm
Lifting tool	Platform
Platform size	485x460 mm
Lifting speed	140 mm/ sec
Batteries	2 x 7,5 Ah, 12V
Charging voltage	100-240 V
Charger	24 V, 1 A
Safety class	IP 54
Wheel diameter	60 / 125 mm
Material	Rfr
Extra	QCS
Charger article H31514 and adapter not included!	

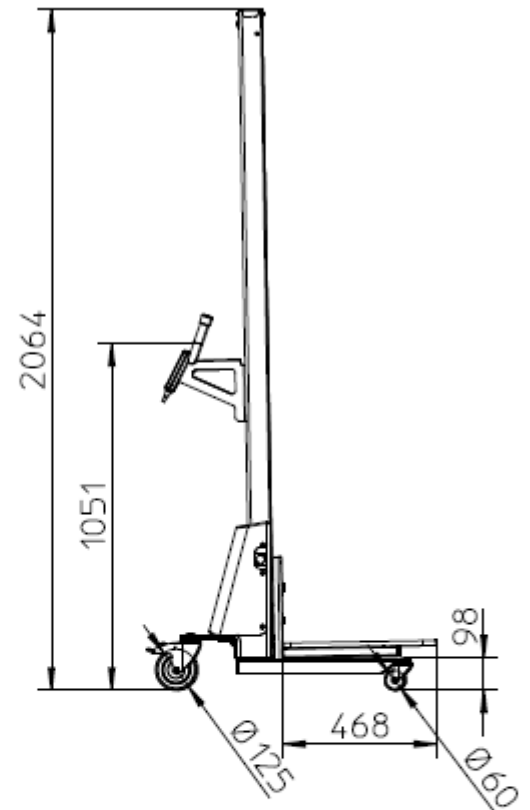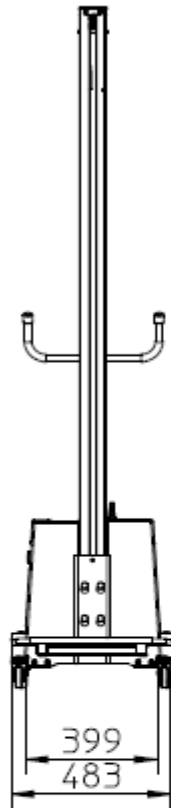

Removable control unit



Battery indikator

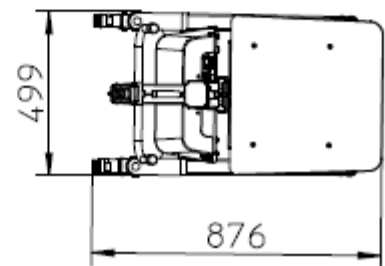

TnT Handling USA, Inc.

Ph: 610-701-6350

Fx: 610-701-6354

E-mail info@tnthandling.com , Web www.tnthandling.com

HALLINS